



## APPENDIX UL Standards and CSA Standards for NX Series

この付属書は、UL規格の認証に必要な情報を記載しています。

This appendix describes the information required for UL recognition.

本附録中記載著 UL規格認証必需的資訊。

本附录中记载着 UL规格认证必需的信息。

This product is recognized by UL.


This information is important when you use this product as Recognized Component by UL.

### ■ Speed-Torque characteristics


#### ● Standard type

Motor model	Continuous stall current [A]	Heat sink size [mm (in.)]	Maximum speed [r/min]
NXM45A NXM45M	0.91	250×250×6 (9.84×9.84×0.24)	5,500
NXM410A NXM410M	1.12		
NXM620A NXM620M	1.8		
NXM640A NXM640M	3.2	300×300×10 (11.81×11.81×0.39)	
NXM975A NXM975M	5.9	350×350×10 (13.78×13.78×0.39)	


#### ● NXM45A, NXM45M

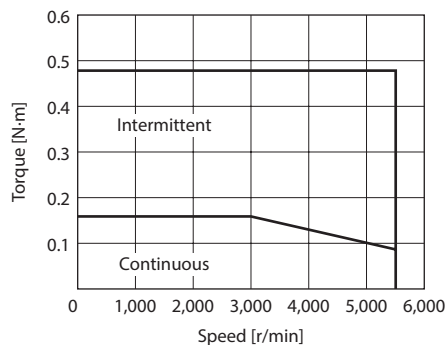


#### ● NXM410A, NXM410M

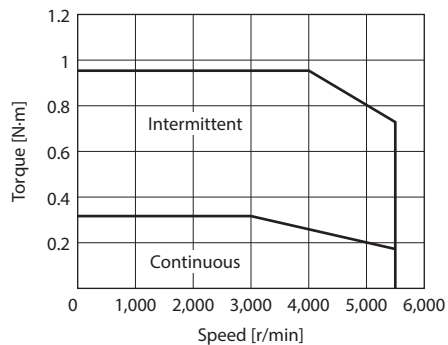


#### ● NXM620A, NXM620M

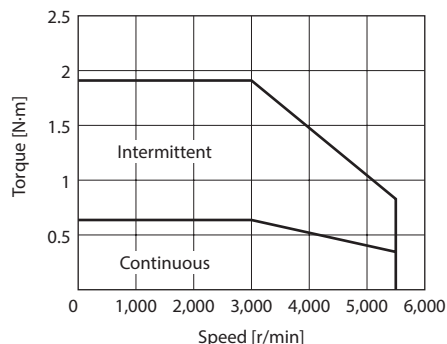

#### ● NXM640A, NXM640M

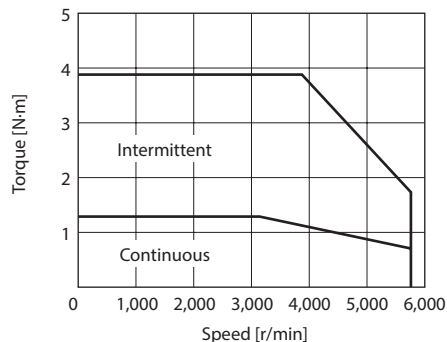


#### ● NXM975A, NXM975M

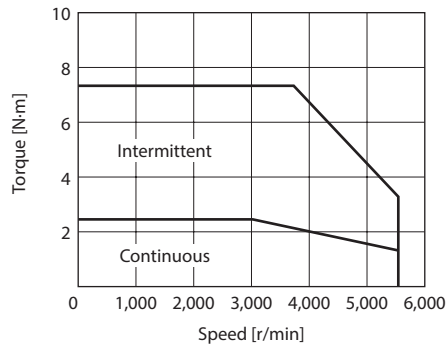


● Geared type

Motor model	Continuous stall current [A]	Heat sink size [mm (in.)]	Maximum speed [r/min]
NXM45A NXM45M	0.91	250×250×6 (9.84×9.84×0.24)	3,000
NXM410A NXM410M	1.12		
NXM610A-J NXM610M-J	1.1		
NXM620A-J NXM620M-J NXM620A NXM620M	1.8		
NXM640A NXM640M	3.2	300×300×10 (11.81×11.81×0.39)	
NXM940A-J NXM940M-J	5.1		
NXM975A-J NXM975M-J	5.9	350×350×10 (13.78×13.78×0.39)	


● NXM45A, NXM45M

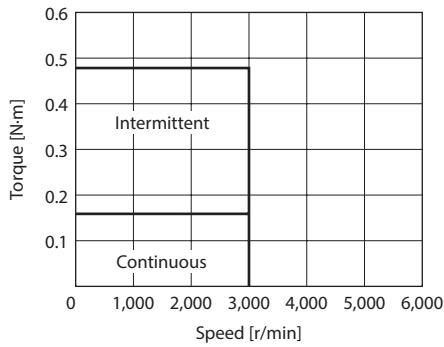


● NXM410A, NXM410M

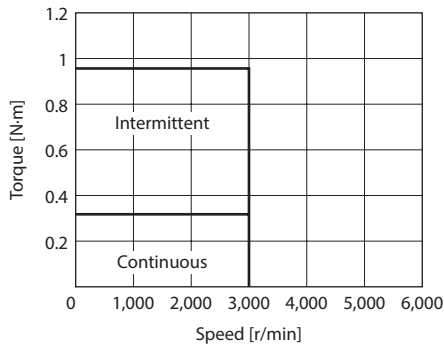


● NXM610A-J, NXM610M-J

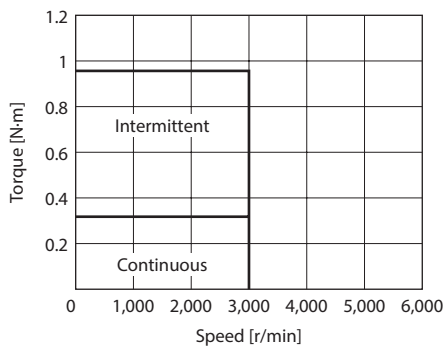


● NXM620A-J, NXM620M-J, NXM620A, NXM620M

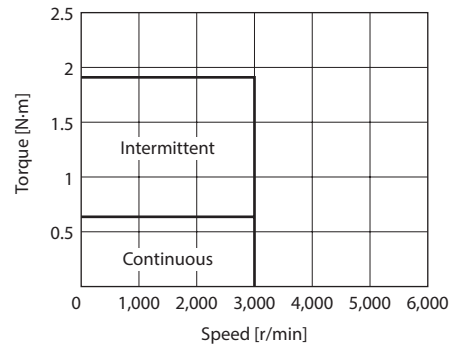

● NXM640A, NXM640M

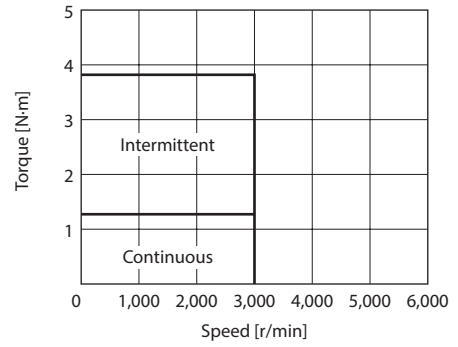

● NXM940A-J, NXM940M-J

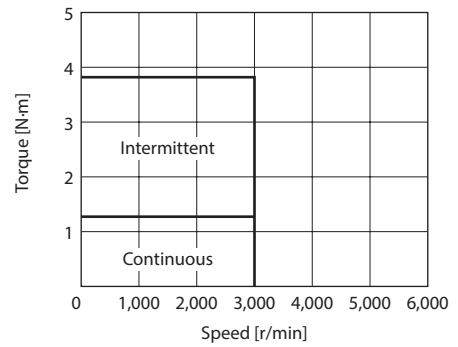

● NXM975A-J, NXM975M-J

